



Energy saving

Save money on cooling bills



Heat protection

Rejects radiant heat



Light protection

Glare is reduced



Privacy protection

Gives daytime privacy



Uniform temperature

Hot and cool spots are levelled off



Manufacturer

Commonwealth
Laminating&Coating, USA



35 years of experience

One of the longest-operating
distributors in the industry



Modern appearance

The building gets more beautiful



UV protection

Protects your health and
your valuables

Energy saving on various window systems



Single pane




Dual pane



Dual pane
low-e



Triple pane
low-e

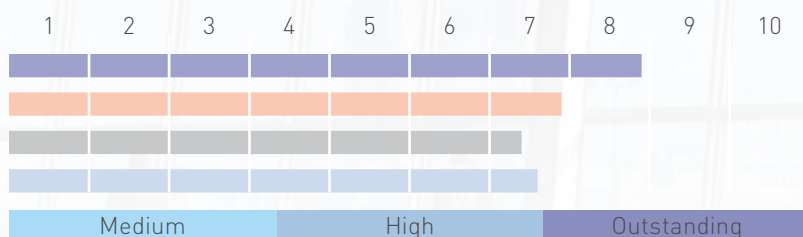

Save energy with window films!

	Single pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	79%	69%	64%	66%
Visible Light Transmitted	15%	17%	17%	16%
Visible Light Reflected Exterior	60%	59%	59%	58%
Visible Light Reflected Interior	58%	59%	59%	59%
Total Solar Energy Reflected	55%	52%	52%	47%
Total Solar Energy Absorbed	33%	36%	36%	43%
Total Solar Energy Transmitted	12%	12%	12%	11%
SHGC	0,25	0,31	0,36	0,34
UV Rejection	99%	99%	99%	99%
U-Value	5,337	2,618	1,434	1,153
Emissivity	0,84	0,84	0,84	0,84
Compatibility	Compatible	Compatible	Compatible	Conditionally Compatible



Interior/exterior

Interior



Thickness

38 microns



Adhesive

Pressure sensitive



Scratch Resistant Coating

2nd generation



Sizes available

0,91×30 m, 1,22×30 m
1,52×30 m, 1,83×30 m



Warranty

10 years



Energy saving

Save money on cooling bills



Heat protection

Reduces radiant heat



Light protection

Glare is reduced



Privacy protection

Gives daytime privacy



Uniform temperature

Hot and cool spots are levelled off



Manufacturer

Commonwealth
Laminating & Coating, USA



35 years of experience

One of the longest-operating
distributors in the industry



Modern appearance

The building gets more beautiful



UV protection

Protects your health and
your valuables

Energy saving on various window systems



Single pane




Dual pane



Dual pane
low-e



Triple pane
low-e

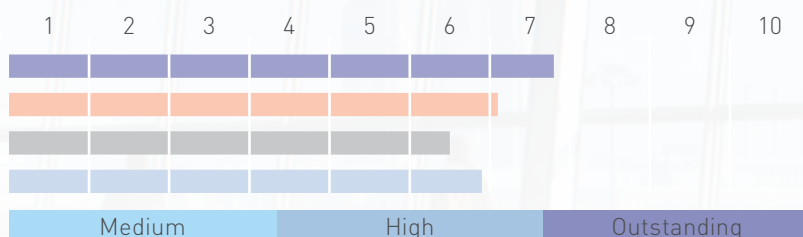

Save energy with window films!

	Single pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	68%	61%	55%	59%
Visible Light Transmitted	28%	27%	27%	25%
Visible Light Reflected Exterior	44%	48%	48%	49%
Visible Light Reflected Interior	40%	47%	47%	47%
Total Solar Energy Reflected	43%	44%	44%	40%
Total Solar Energy Absorbed	35%	36%	36%	43%
Total Solar Energy Transmitted	22%	19%	19%	17%
SHGC	0,34	0,39	0,46	0,41
UV Rejection	99%	99%	99%	99%
U-Value	5,394	2,633	1,439	1,156
Emissivity	0,84	0,84	0,84	0,84
Compatibility	Compatible	Compatible	Compatible	Conditionally Compatible



Interior/exterior

Interior



Thickness

38 microns



Adhesive

Pressure sensitive



Scratch Resistant Coating

2nd generation



Sizes available

0,91×30 m, 1,22×30 m
1,52×30 m, 1,83×30 m



Warranty

10 years

Skyfol SI50

Window film



Heat protection

Reduces radiant heat



UV protection

Protects your health and your valuables



Light protection

Glare is reduced



35 years of experience

One of the longest-operating distributors in the industry



Neutral appearance

Practically unnoticeable



Manufacturer

Commonwealth Laminating & Coating, USA


Energy saving on various window systems



Single Pane



Dual pane

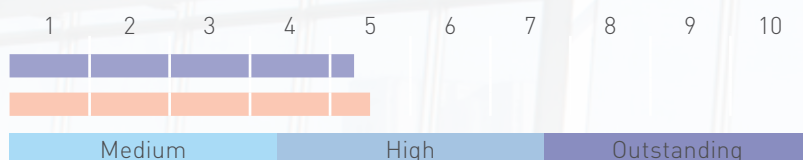

Save energy with window films!

	Single Pane	Dual pane
Total Solar Energy Rejected	43%	45%
Visible Light Transmitted	58%	46%
Visible Light Reflected Exterior	14%	29%
Visible Light Reflected Interior	12%	25%
Total Solar Energy Reflected	12%	25%
Total Solar Energy Absorbed	43%	41%
Total Solar Energy Transmitted	45%	34%
SHGC	0,66	0,55
UV Rejection	99%	99%
U-Value	5,41	2,70
Emissivity	0,84	0,81
Compatibility	Compatible	Compatible



Interior/exterior

Interior



Adhesive

Pressure sensitive



Sizes available

1.52x30 m (60"x100')



Thickness

38 microns (1.5 mil)



Scratch Resistant Coating

2nd generation



Warranty

10 years